



AVK-N1200

C€∣F©©


IP NETWORK PTZ KEYBOARD CONTROLLER

OVERVIEW

- Supports remote upgrading by Web client
- Seamless integration with NVMS
- Supports PTZ mode, Serial Port Mode, Platform Mode, up to 256 speed domes controllable in PTZ mode
- Supports playback control of TV wall clients
- Supports control of decoding videos
- Supports keypad tones

Unit : inch(mm)

DIMENSIONS

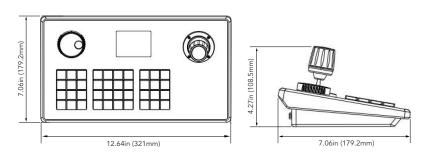

SPECIFICATIONS

LOCAL PARAMETERS	
Display	TFT LCD 320x240
Operation Interface	4D Joystick, Knob, Buttons
NETWORK PARAMETERS	
Interface	1 RJ45 10/100M adaptive Ethernet port
Control Mode	PTZ mode, Platform Mode, and Serial Port Mode
	The software can be upgraded by WEB Client
SERIAL PORT PARAMETERS	
Serial Port	R\$422x1 / R\$232x1
Baudrate	1200bps, 2400bps, 4800bps, 9600bps, 19200bps
OTHERS	
Power	DC12V 2A
PoE	Supports PoE Power Supply (IEEE802.3 af)
Power Consumption	≤5W
Working Temperature	14°~131°F (-10°~55°C)
Working Humidity	20~80% (non-condensing)
Storage Temperature	14°~140°F (-10°~60°C)
Storage Humidity	0~90% (non-condensing)
Dimensions	12.64in (321mm) × 7.06in (179.2mm) × 4.27in (108.5mm)
Net Weight	3.59lbs (1.63kg)

All content on AVYCON's digital and printed marketing materials, including product names, part numbers, unique identification letters, etc., are trademarks of AVYCON. Any unauthorized use or distribution of trademarked content is strictly prohibited by law. In addition, graphical designs, images, features, and specifications on such material may differ from the actual product and subject to change without notice. For the latest product information, please visit our website or contact one of our product specialists at marketing@avycon.com.