



## AVC-KHN41FT/2.8 AI

NDAA COMPLIANT | CE | FCC


4MP H.265 NETWORK IR DOME CAMERA

### OVERVIEW

- H.265 Main Profile Video Compression
- Maximum Resolution: 2592 x 1520
- 4MP (2592 x 1520) Full Real Time Coding
- Smart IR Illumination Up to 33ft.
- True Day/Night ICR Auto Switch
- 3D DNR, True WDR, HLC & BLC
- Supports Defog
- Supports ROI Encoding
- Smart Alarm with Motion Features
- Supports Local CVBS Video Output / Analog Video Output
- Built-in micro SD card slot with video and still image capture function (up to 256GB)
- Supports Triple Streams
- P2P Remote Connection Function
- Supports Monitoring by Smart Phones, iPad, and Remote Monitoring
- DC12V (±10%) / PoE (802.3af) <3.5W (IR ON)

### DIMENSIONS

Unit : inch(mm)

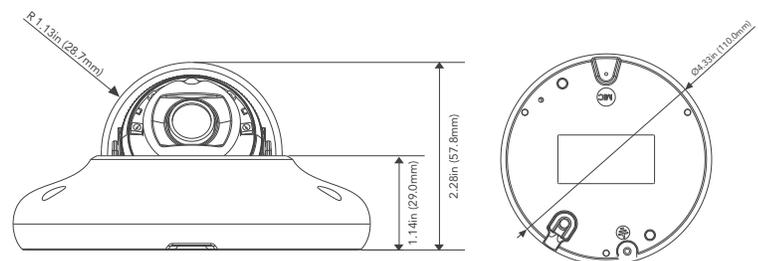

### OPTIONAL ACCESSORIES



AVM-EWMTS-W-TL1  
WALL MOUNT

## SPECIFICATIONS

CAMERA					
Image Sensor	1/3" Progressive Scan CMOS				
Image Size	2592 x 1520				
Shutter Speed	1/2s to 1/100,000s				
Iris Type	Fixed Iris				
Min. Illumination	Color: 0.045 lux @ F1.8(AGC ON); BW: 0 lux with IR				
IR Distance	Up to 33ft				
Lens	Fixed 2.8mm @ F1.8 Horizontal FoV: 103°				
Lens Mount	M12				
Day & Night	ICR				
Wide Dynamic Range	120dB				
Digital NR	3D DNR				
Backlight Compensation (BLC)	Yes				
Highlight Compensation (HLC)	Yes				
Defog	Yes				
Angle Adjustment	Pan: 0°~360° ; Tilt: 0°~70° ; Rotation:0°~350°				
VIDEO IMAGE					
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub/third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG				
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile				
Resolution	4MP (2592x1520), 2K (2560x1440), 3MP (2304x1296), 1080P (1920x1080), 720P (1280x720), D1, CIF, 480x240				
Main Stream	60Hz: 4MP/2K/3MP/1080P/720P (1~30fps); 50Hz: 4MP/2K/3MP/1080P/720P (1~25fps);				
Sub Stream	60Hz: 720P/D1/CIF (1~30fps); 50Hz: 720P/D1/CIF (1~25fps)				
Third Stream	60Hz: D1/480x240/CIF (1~30fps); 50Hz: D1/480x240/CIF (1~25fps)				
High Frame Rate Mode	60Hz: D1/480x240/CIF (1~30fps); 50Hz: D1/480x240/CIF (1~25fps)				
Video Bit Rate	128 Kbps ~ 8 Mbps (CBR / VBR Adjustable)				
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser				
ROI	Each ROI to be configured separately				
NETWORK / INTERFACE					
Network	1 x RJ45 10M / 100M Self-Adaptive Ethernet port				
Network Protocol	IPv4, IPv6, DHCP, NTP, RTSP, RTP, UDP, RTMP (v5.x firmware and above), RTCP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP, HTTP POST, 802.1x, UPnP, HTTPS, QoS				
Interface Protocol	ONVIF, GB-T/28181-2011				
Online Connection	Support simultaneous monitoring for up to 6 users; Support multi-stream real time transmission				
Storage	Micro SD/SDHC/SDXC Slot (up to 256GB) with video and still image capture function				
Video Output	CVBS output (BNC x 1)				
Audio	1CH audio input; 1CH build-in MIC				
Audio Compression	G711A / U				
Alarm	No				
Hardware Reset	Yes				
DORI DISTANCE					
	Lens	Detect	Observe	Recognize	Identify
	2.8mm	N/A	N/A	N/A	N/A
FUNCTIONS					
Remote Monitoring	Web Browser Interface, Mobile App, AVYCON CVMS 2.0				
Smart Alarm	Motion detection; SD card error; SD card full				
Smart Analytics	Object removal detection, regional intrusion detection, abnormal video detection, line crossing detection, people intrusion, people counting and crowd density detection ( optional )				
General Function	Watermark, IP address filtering, video mask, heartbeat, password protection				
GENERAL					
Power Supply	D12V/POE(IEEE802.3af)				
Power Consumption	<4.5W				
Operating Environment	-30°C ~ 60°C (-22°F ~ 140°F) Humidity: less than 95% (non-condensing)				
Storage Environment	-30°C ~ 65°C (-22°F ~ 149°F) Humidity: less than 95% (non-condensing)				
Dimensions (in)	Ø 4.33 x 2.35				
Weight (lb)	Approx. 0.77 lbs				
Ingress Protection	IP66				
Certificate	N/A				
Installation	Ceiling mounting; Wall mounting				
Environmental Protection	N/A				
Color / Material	White / Plastic				