



AVC-NPE81F2D AI

NDA
COMPLIANT | CE | FC


8MP H.265 DUAL LENS PANORAMIC TURRET NETWORK CAMERA

OVERVIEW

- 8MP (5120 × 1440) H.265+, H.265, H.264+, H.264, MJPEG
- Max. resolution: 5120×1440
- Dual Lens Stitched Panoramic View (2 x 2.8mm Fixed Lens)
- Full Color / Active Deterrence Camera
- 3D DNR, DWDR, HLC, BLC, ROI encoding
- Intelligent Analytics
- White Light LED / Strobe (Blue & Red) Light
- Built-in MIC / Speaker
- Built-in micro SD card slot, up to 512GB
- IP67 ingress protection
- DC12V/PoE power supply
- Support remote monitoring by AVYCON ONE (Mobile APP) and AVYCON CMSONE (CMS)

DIMENSIONS

Unit : inch(mm)

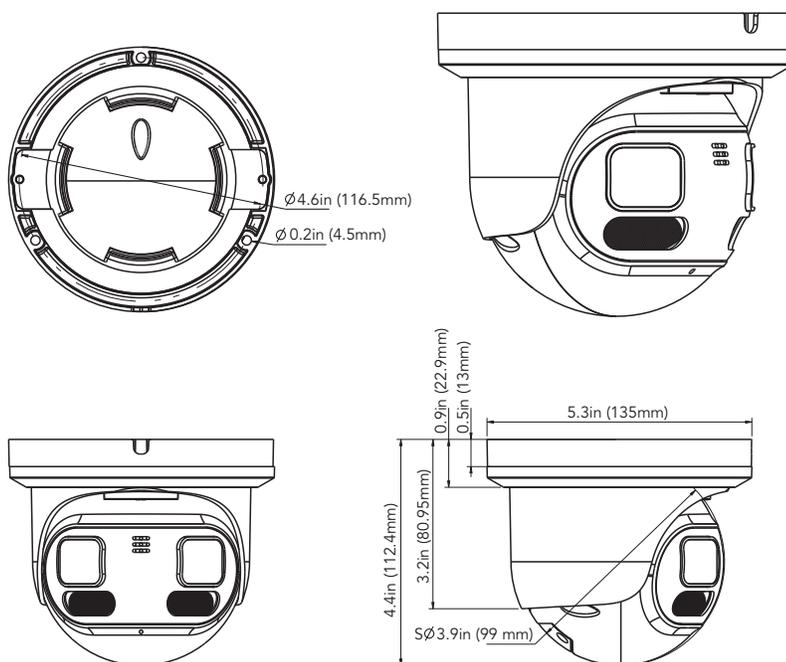

OPTIONAL ACCESSORIES



AVM-JB-BE-L1
JUNCTION BOX



AVM-CWM-EDV-L1
COMPACT
WALL MOUNT



AVM-HWM-E-L1
WALL MOUNT
WITH JUNCTION BOX



AVM-HCM-E-L1
CEILING MOUNT
WITH JUNCTION BOX



AVM-JB-DUAL-UL1
DUAL JUNCTION BOX



AVM-P-POM-A2
POLE
MOUNT BRACKET



AVM-CRM-A1
CORNER
MOUNT BRACKET

SPECIFICATIONS

| CAMERA | |
|-----------------------------------|---|
| Imaging Device | 1/2.7" Progressive CMOS x 2 |
| Resolution | Main Stream: 5120x1440; 4608x1296; 4096x1152; 3840x1080; 3072x864 Sub Stream: 1536x432; 1024x288 |
| Max. Framerate | Main Stream: Max. 15fps (60Hz/50Hz) |
| Min. Illumination | Color: 0.001 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR |
| Video Out | N/A |
| LENS | |
| Focal Length (Zoom Ratio) | 2.8mm Fixed |
| Max. Aperture Ratio | F1.2 |
| Angular Field of View | Horizontal field of view: 180° |
| Min. Object Distance | 3.28ft (1M) |
| Focus Control | N/A |
| Lens Type | Fixed (M16) |
| PAN / TILT / ROTATE | |
| Pan / Tilt / Rotate Range | N/A |
| OPERATIONAL | |
| Camera Title | Title displayed up to 32 characters |
| Day & Night | Full Color Mode, Day/Night Mode, Auto |
| Backlight Compensation | BLC, HLC, WDR |
| Digital Noise Reduction | 3D DNR |
| Digital Image Stabilization | N/A |
| Motion Detection | Rectangle Grid (8 Levels of Sensitivity) |
| Privacy Masking | 4 Rectangle Zones |
| Gain Control | AUTO |
| White Balance | AUTO / MANUAL |
| LDC | N/A |
| Electronic Shutter Speed | AUTO / Manual (1/5 ~ 1/20000s) |
| Video Rotation | Flip / vMirror |
| Analytics | Face Detection, Human&Vehicle Detection, Intrusion Detection, Tripwire Detection, Stationary Object Detection, Tripwire Count, Heat Map, Crowd Density Detection, Queue Length Detection, License Plate Detection, Rare Sound Detection, Loitering Detection, Region Entrance Detection, Region Exiting Detection |
| Alarm I/O | N/A |
| Alarm Triggers | Motion, Sound Detection, Video Tampering |
| Alarm Events | Warning Light, Siren, Notification via E-mail, Image file upload via FTP, Video file upload via FTP, Image file upload to Cloud (Dropbox), Video file upload to Cloud (Dropbox), Micro SD recording at event triggered, Event Push via HTTP / UDP |
| Audio In | Built-in MIC |
| Audio Out | Built-in Speaker |
| IR Viewable Length | Max. 98ft (30M) |
| White Light LED Viewable Length | Max 49ft (15M) |
| NETWORK | |
| Ethernet | RJ45 (10/100BASE-T) |
| Video Compression | H.265+/H.265 Main Profile, H.264+/H.264 High Profile, MJPEG (Sub Stream Only) |
| Audio Compression | G.711a / G.711u |
| Bitrate Control | CBR or VBR (128Kbps ~ 8Mbps) |
| Streaming | Unicast/Multicast |
| Protocol | TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, SMTP, NTP, UPnP, SNMP, HTTPS, FTP, RTMP, IPv4/IPv6, PPPoE, UDP |
| Security | Login Authentication, IP Address Filtering, User access log |
| Application Programming Interface | ONVIF Profile G/M/S/T, REST API |
| GENERAL | |
| Webpage Language | English, Korean |
| Edge Storage | Micro SD/SDHC/SDXC Slot (up to 512GB) with video and still image capture function |
| Memory | N/A |
| ENVIRONMENTAL & ELECTRICAL | |
| Operating Temperature / Humidity | -22 ~ 140 F (-30 ~ +60°C) / less than ≤ 95% RH |
| Storage Temperature / Humidity | -22 ~ 140 F (-30 ~ +60°C) / less than ≤ 95% RH |
| Certification | IP67 |
| Input Voltage | PoE (IEEE802.3at) /12VDC |
| Power Consumption | DC 12V/POE, max. 13.49W |
| MECHANICAL | |
| Color / Material | White / Metal |
| Product Dimensions / Weight | Ø5.3" x 4.4" (Ø135mm x 112.4mm), Approx. 1.69lbs (765g) |
| DORI (EN62676-4-STANDARD) | |
| Detect (25PPM / 8PPF) | 164ft(50.0m) |
| Observe (63PPM / 19PPF) | 73.49ft(22.4m) |
| Recognize (125PPM / 38PPF) | 36.75ft(11.2m) |
| Identify (250PPM / 76PPF) | 18.37ft(5.6m) |