



# AVC-TV21F28

**NDAA**  
COMPLIANT


2MP HD-TVI FIXED VANDAL DOME CAMERA

## OVERVIEW

- 2MP (1920 x 1080)
- Fixed 2.8 mm Lens
- HD-TVI / CVI / AHD / CVBS (Analog)
- Easy-to-Use DIP Switch to Change Formats
- True Day / Night
- Smart IR Illumination Up to 65ft.
- Digital NR
- DWDR
- IP67 Outdoor Rating
- IK10 Vandal Proof Rating
- DC 12V (±10%, 3W Consumption)
- NDAA Compliant

## DIMENSIONS

Unit : inch(mm)

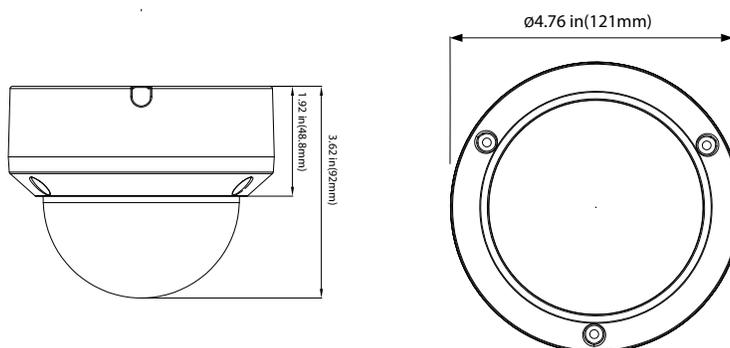

## OPTIONAL ACCESSORIES



AVM-JB-V-L1  
JUNCTION BOX



AVM-CWM-EDV-L1  
COMPACT WALL MOUNT



AVM-HWM-V-L1  
HEAVY-DUTY WALL MOUNT



AVM-HCM-V-L1  
CEILING MOUNT



AVM-CRM-A1  
CORNER MOUNT



AVM-P-POM-A2  
POLE MOUNT



AVM-RM-V-L1  
RECESSED CEILING MOUNT

## SPECIFICATIONS

CAMERA	
Image Sensor	1/2.7" Progressive Scan CMOS
Resolution	2MP
Image Size	1920 x 1080
Video Output	1-channel BNC Video Output
Image System	PAL / NTSC
Electronic Shutter	1/15s to 1/50,000s
IR Distance	Up to 65ft (20m)
Video Formats	HD-TVI / AHD / CVI / CVBS (Analog)
Frame Rate	HD-TVI / AHD / CVI / CVBS (Analog): 30 FPS
Min. Illumination	0.01luxF1.2(AGC ON), 0Lux with IR ON
Lens	Fixed 2.8mm Lens
Horizontal Field of View	115.9° (W) -33.8° (T)
Lens Mount	M12
S/N Ratio	40dB
Function Control	OSD, Control over Coax (UTC)
IMAGE	
Day & Night	EXT / Auto / Color / BW (Black and White)
Digital WDR	Yes
Digital NR	Yes (3D DNR)
Auto Gain Control (AGC)	Yes
Auto White Balance (AWB)	Yes
Backlight Compensation (BLC)	Yes
Edge Brightness Compensation	Yes
Defog	No
HLC	No
Sharpness	Yes
Mirror Image	Yes
Smart IR (Anti-SAT)	Yes
Image Setting	Yes
Defect Correction	Auto / Manual
GENERAL	
Angle Adjustment	Any Angle
Input Voltage	DC 12V (±10%)
Power Consumption	Maximum 3W
Ingress Protection	IP67
Vandal Rating	IK10
Working Environment	-22°~131° F (-30°~55° Celcius)
Dimensions	Ø4.76" x 3.62" (Ø121mm x 92mm)